



Protractor

Protractor Smart

DESCRIPTION

- Protractor with integrated Bluetooth® system
- Housing Ø 59.5 mm rotatable by 270°.
- Large display with colour LED tolerance status indication
- Angular value display in : Degrees, resolution 0.01° / Degrees/minute, resolution 0°01' / Radian, resolution .0001
- Three buttons, including the central button with selectable favourite function
- Ruler length 200 mm (other lengths available as an option)
- Measuring range: 1 x 360°, 2 x 180°, 4 x 90°.
- Additional data outputs Proximity and Power
- Protection class IP54



E






Protractor


Protractor Smart

ACCESSORIES

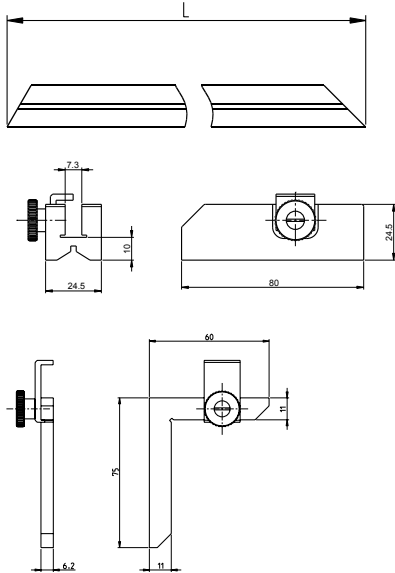

820-2420	Scale L 200 mm
820-2430	Scale L 300 mm
820-2450	Scale L 500 mm
820-2460	Stand for vertical application and small angular measurements
820-2461	Square for small angular measurements

APPLICATIONS

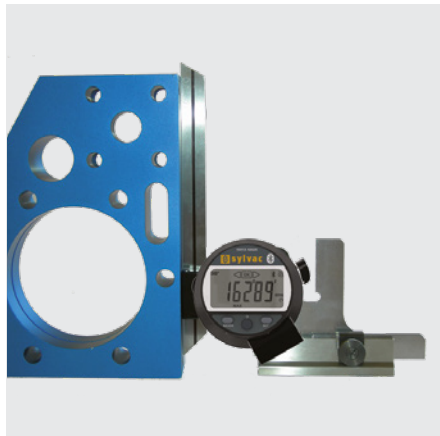

Measurement with accessory type 820-2460



Standard measurement



Measurement with accessory type 820-2461

E